

DH-K809A ABS



□□/□□□□

- [illegible]



Dimensions	66Lx45Wx30H(mm)
Finished for Shell	Plastic, Abrasion Resistant
Output Contact	NC/NO/COM
Input	12VDC (24VDC by Optional)
Current	8mA
Transmitting Freq	433.92MHZ
Transmitting Power	10mW
Suitable for	access control
Transmitting Distance	≥70m(in open area)
Finished for Shell	Plastic, Abrasion Resistant
Capable	30 Transmitter
Weight	0.2kg

□□□

1.□□□□□DC10-14V

2.□□□□ <5MA

3.RF□□□315MHz□433MHZ

4.RF□□□□□□□□□□

5□□□□□□□ > 90dBm

6.□□□□□ > 100□□□□□□□□□□


7□□□□□□MCU□□□□□

8.□□□□□□□□□50□

9□□□□□□□□□□□□□□□□

10.□□□1CH

- RKE

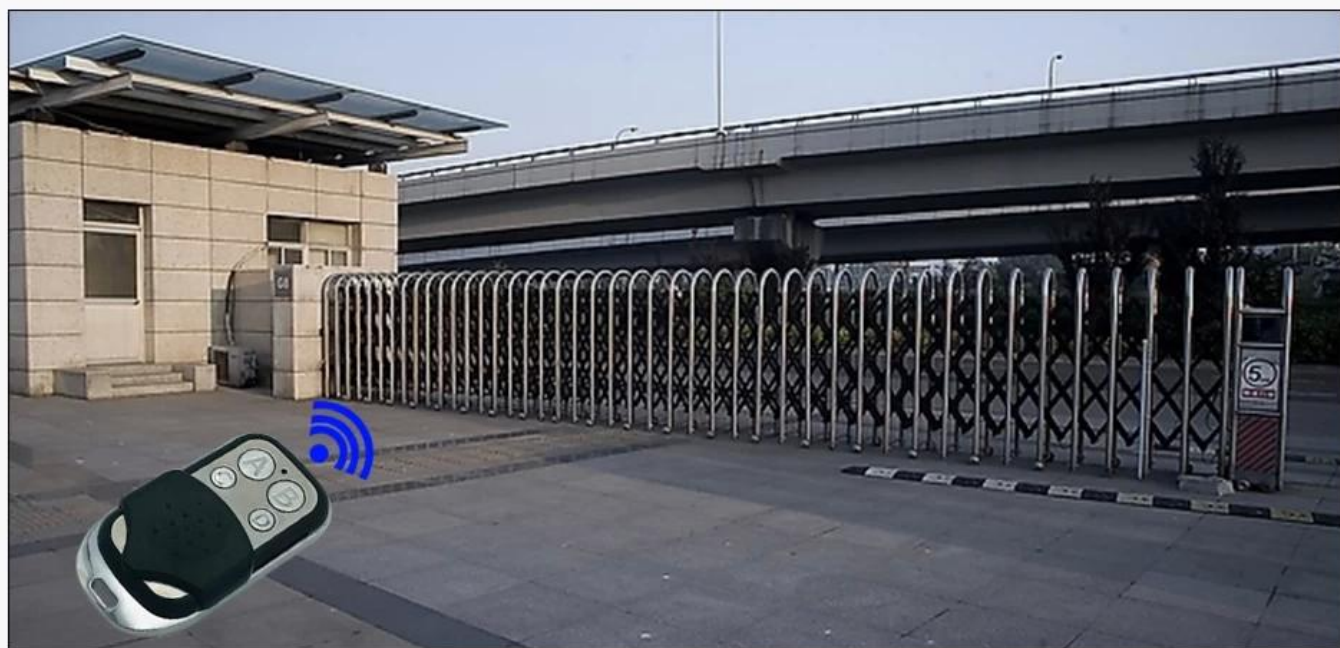

111

```
1.log[0]LED[0]LED[0]
```

5. 3S LED

2. LED 5 3S LED

3. 3

4. 5s 10s 15s

CONTACT US



Sincerely for your service

You are welcome to come to consult

Contact: Yimo Yang

Cellphone/Wechat/Whatsapp: +86 13612936220

Skype: udohow3

Email: udohow1@udohow.com

Web: www.udohow.com

HOME