



Funktion:

- A. automatische schließung;
- B. schließgeschwindigkeit kann eingestellt werden;
- C. Einige Türschließer haben die Funktion zu bleiben.

## PRODUCT DETAILS SHOW

### 1 STRETCHABLE MECHANIC ARM

Mechanic Arm can be adjustable,stretchable,even when doorframe and door are not in same plane, it is still able to be installed,satisfying your multiple requirements



### 2 FASTENED RIVETS

Fastening Rivets assure stability in connection, effective solution in usage and safety, premium performance in wearproof




### 3 MAIN BODY

Special Structure Design For Components,Multi-Step Processes For Manufacturing,Pass 100000 Times Test,Premium&Durable



### 4 POLE&BEARING

Special Structure Design For Components, Multi-Step Processes For Manufacturing, Pass 100000 Times Test,Premium&Durable

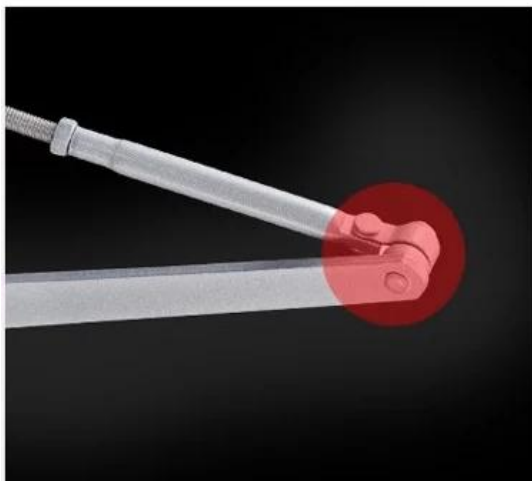

Vorteil:

Der Türschließer wird oben am Türblatt mit einfacher Öffnung installiert und ist für Holztüren, Stahltüren und Brandschutztüren geeignet.

Gilt für Einzeltüren mit einer maximalen Türbreite von 950 mm und einem Türgewicht von 25-45 kg.

01

## CONFIRM TYPE OF DOOR BEFORE INSTALLATION



### SUITABLE FOR THESE DOORS

Wooden Door, Aluminum Door, Stainless Steel Door, Iron Door,  
Fireproof Door, Anti-Theft Door, Hollow Metal Door etc.  
Could be installed on the right or left



Fireproof Door



Wooden Door




Metal Door



Anti-Theft Door


02

## ASSURE DOOR AND DOORFRAME ARE ON THE SAME PLANE

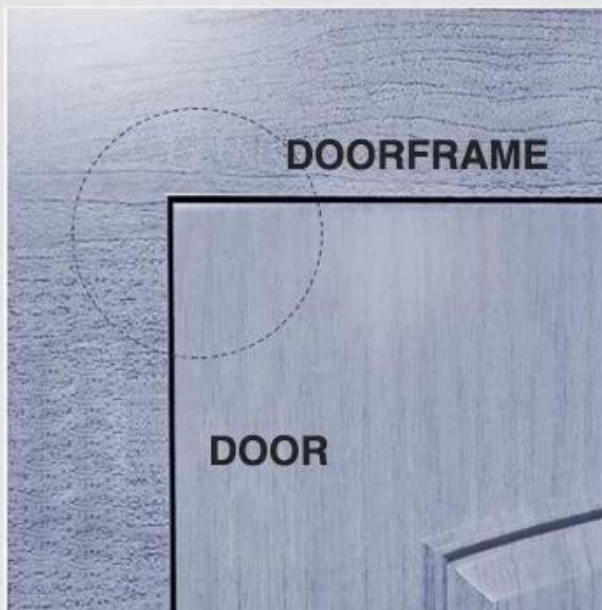

### DOOR AND DOORFRAME ARE ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe are on the same plane, then door closer will work

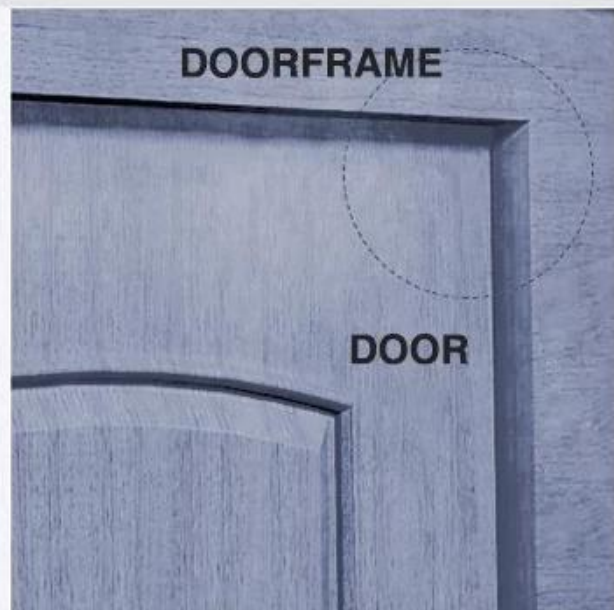

### DOOR AND DOORFRAME ARE NOT ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe are on the same plane, then door closer will work