



Une fonction:

Fermeture automatique;

La vitesse de fermeture de B. peut être ajustée;

Certains ferme-porte ont la fonction de rester.

PRODUCT DETAILS SHOW

1 STRETCHABLE MECHANIC ARM

Mechanic Arm can be adjustable,stretchable,even when doorframe and door are not in same plane, it is still able to be installed,satisfying your multiple requirements



2 FASTENED RIVETS

Fastening Rivets assure stability in connection, effective solution in usage and safety, premium performance in wearproof



3 MAIN BODY

Special Structure Design For Components,Multi-Step Processes For Manufacturing,Pass 100000 Times Test,Premium&Durable



4 POLE&BEARING

Special Structure Design For Components, Multi-Step Processes For Manufacturing, Pass 100000 Times Test,Premium&Durable



Avantage:

Le ferme-porte est installé en haut du vantail avec une seule ouverture, s'applique à la porte en bois à la porte en acier et à la porte coupe-feu.

Applicable à une porte avec une largeur de porte maximale de 950 mm et un poids de porte compris entre 85 et 100 kg.

01

CONFIRM TYPE OF DOOR BEFORE INSTALLATION



SUITABLE FOR THESE DOORS

Wooden Door, Aluminum Door, Stainless Steel Door, Iron Door,
Fireproof Door, Anti-Theft Door, Hollow Metal Door etc.
Could be installed on the right or left



Fireproof Door



Wooden Door




Metal Door



Anti-Theft Door


02

ASSURE DOOR AND DOORFRAME ARE ON THE SAME PLANE

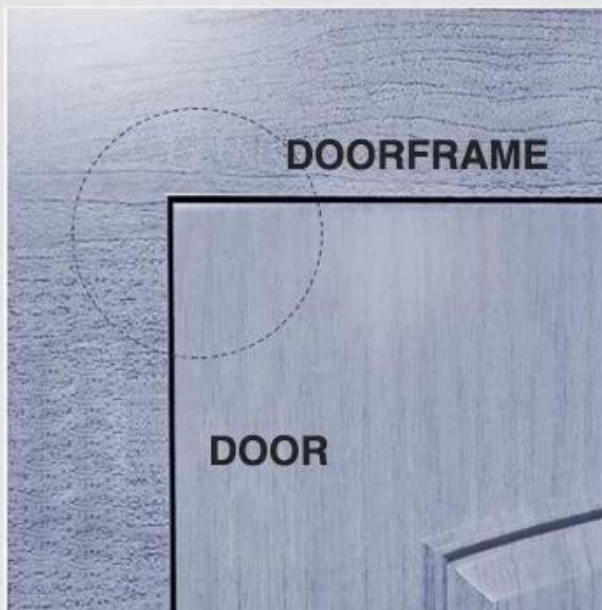

DOOR AND DOORFRAME ARE ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe are on the same plane, then door closer will work

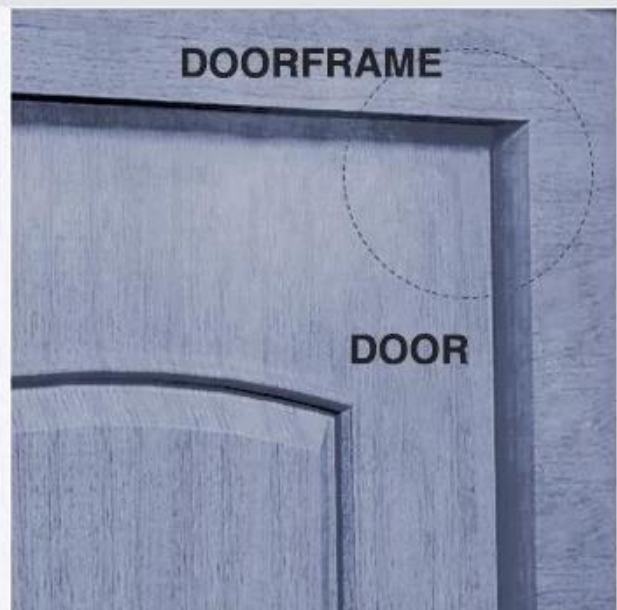

DOOR AND DOORFRAME ARE NOT ON THE SAME PLANE

Whatever you use it on inward or outward door, just make sure door and doorframe are on the same plane, then door closer will work