

A black rectangular receiver unit and a silver and black remote control with a keychain. The remote has two buttons labeled 'A' and 'B' and a black rubberized grip. The receiver is a simple black plastic box with a small loop at the bottom.

[illegible]



Dimensions	66Lx45Wx30H(mm)
Finished for Shell	Plastic, Abrasion Resistant
Output Contact	NC/NO/COM
Input	12VDC (24VDC by Optional)
Current	8mA
Transmitting Freq	433.92MHZ
Transmitting Power	10mW
Suitable for	access control
Transmitting Distance	≥70m(in open area)
Finished for Shell	Plastic, Abrasion Resistant
Capable	30 Transmitter
Weight	0.2kg

111

1. 電源電圧DC10-14V
2. 消費電流 <5MA
3. RF周波数315MHz/433MHZ
4. RF出力電力0dBm~20dBm
5. 感度 > 90dBm
6. 動作距離 > 100m
7. 制御IC MCU
8. 動作温度-50~50℃
9. 外形寸法25mm×25mm×10mm
10. チャンネル1CH

11. 電圧範囲:(交流/直流電圧範囲/電圧範囲/電圧範囲)

12. 電圧範囲

13. 電圧範囲DC12V

14. 電圧範囲10A


15. 電圧範囲10A 250VAC / 10A 125VAC

10A 30VDC / 10A 28VDC

16. 電圧範囲電圧範囲電圧範囲電圧範囲

17. 電圧範囲3.5cm * 3cm * 1.6cm

電圧範囲電圧範囲電圧範囲電圧範囲;電圧範囲電圧範囲RKE;電圧範囲電圧範囲電圧範囲;電圧範囲電圧範囲電圧範囲;電圧範囲電圧範囲電圧範囲電圧範囲

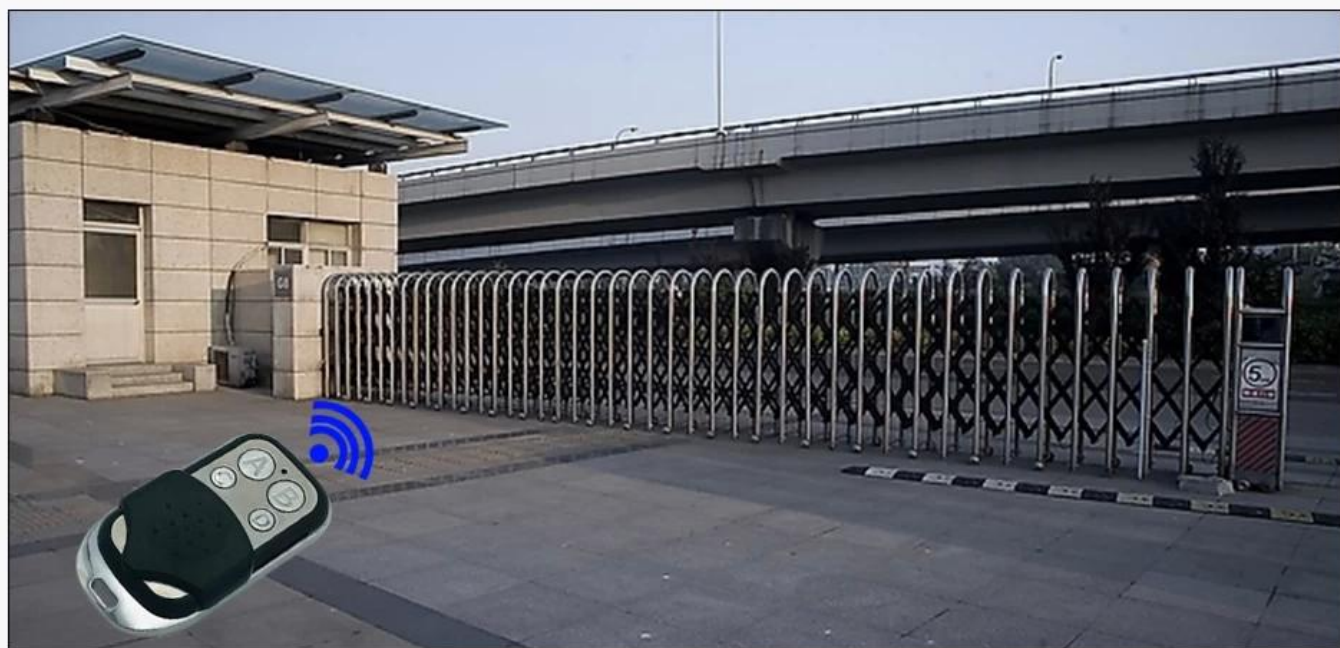

111

1. LED

[illegible]

You are welcome to come to consult

Web: www.udohow.com

HOME

HOME