

RFID



尺寸	228mm×144mm×22 mm
容量	512K
WG	
通道数	32
通道数	32
芯片	S3 128
协议	TCP / IP
接口	16
卡	Card + PW double card PW
D	1-65535
接口	1-255
接口	2
接口	Door
接口	1-65535
接口	
接口	8000
接口	20000
接口	10000
接口	
接口	
接口	

TCP / IP
80002000010000
3232


3路128路128路
NO/NC
16路+ PW/PW
485 TCP / IP



supply





Wiring diagram

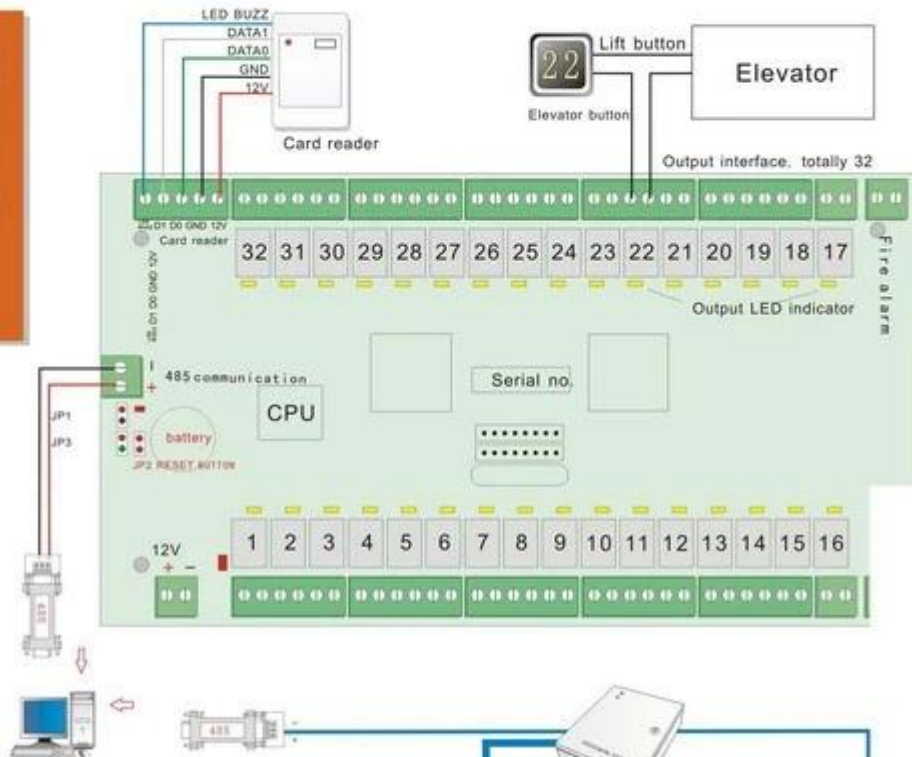

Software features

Support 485 and TCP/IP controllers, all of our access controllers use one software. Have all of functions that professional access control software possesses. Multi-language is possible. Customer can add new language easily. Real-time color show each point's status. Support records showing in full screen, and show user photo. And support sound alarm. Support two database: MS Access and MS SQL server, MS Access as default. Support the authority on access controller, lift controller, locker controller under the same operation. Support operations through software. Support NO or NC status of random defined outputs. Start up software time synchronization, and just click mouse two times to update controllers.

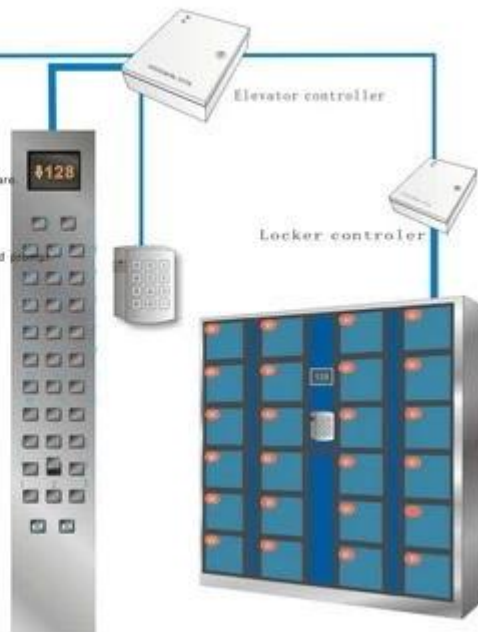

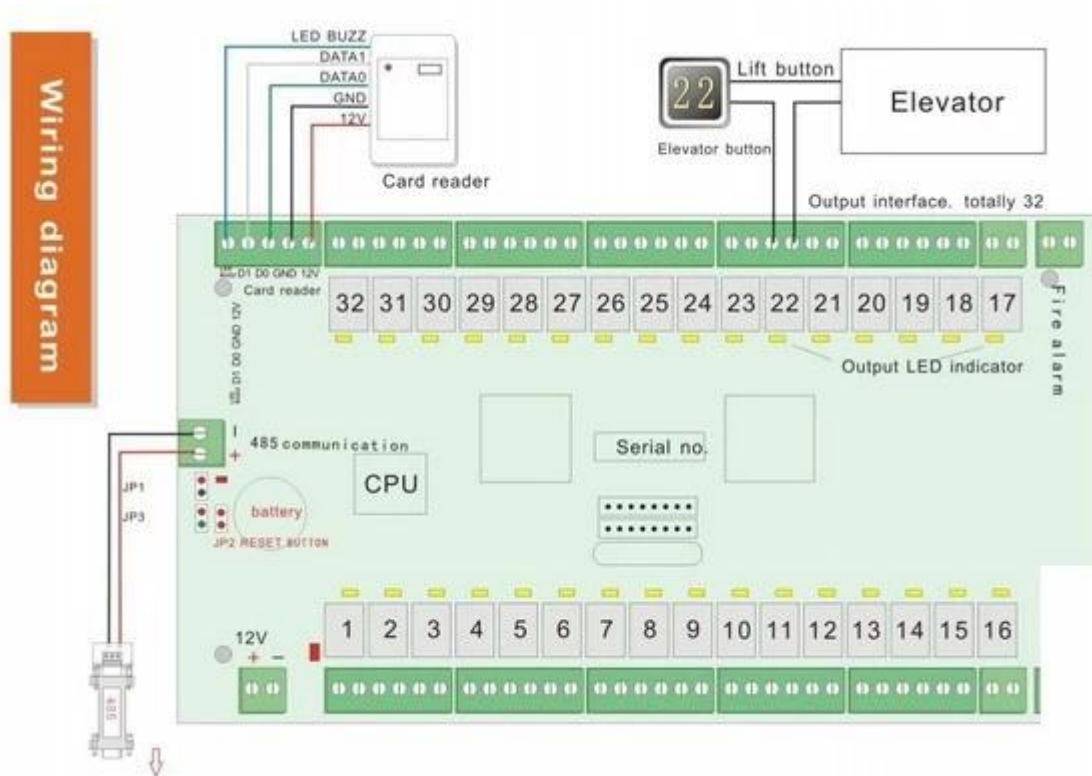

OUR CERTIFICATE



FACTORY / WORKSHOP / EXHIBITION



CONTACT US



Sincerely for your service

You are welcome to come to consult

Contact: Winnie Liang

Cellphone/Wechat/Whatsapp: +86 13602510930

Skype: udohow1

Email: info@udohow.com

Web: www.udohow.com

[Click Back Home](#)