

Video Doorbell

Real time monitoring of door conditions











Doorbell



View Visitors



Wireless



Power




Induction light



Open door



Warning

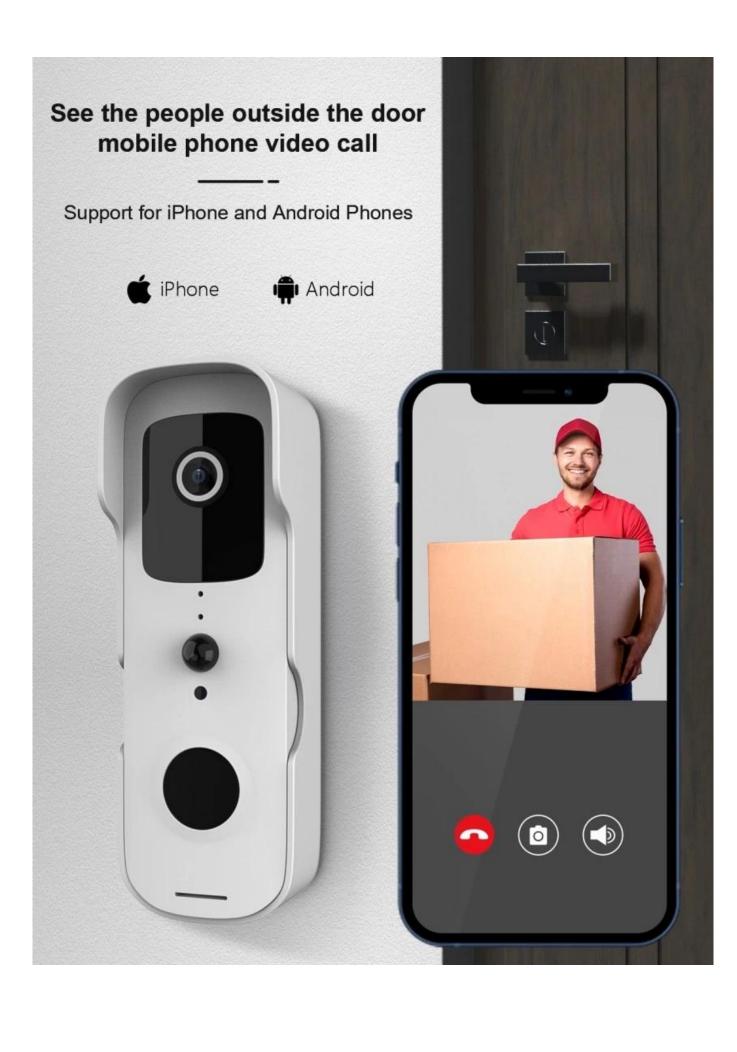



Long distance signal transmission, no need to open the door to know the visiting information.

It can support multiple users to watch online at the same time





Over 6 months long standby





| describe | | wireless connection Ultra-low power consumption Remote active awakening Quick start |
|---------------------|------------------------------------|--|
| | ILICA | Guests will be able to make video voice calls and take short videos. The owner will not need to open the door to know the information |
| | Wake up the way | The doorbell button awakens,PIR body detection wake up,Mobile phone call |
| | Alarm push | Push for 1 second |
| operating system | Number of users online | Multiple users are online simultaneously |
| | Dynamic DNS | Bring your own dynamic domain name |
| | | A powerful, high-performance, programmable media HiSilicon processor with built-in ARM926 @max. 440MHz and high-speed video coprocessor |
| | CCD | 1/2.7 inch 1080p scan CMOS sensor |
| | Sensor performance | Support automatic white balance, automatic gain control, automatic backlighting compensation |
| collect | SNR | ≥39dB |
| | Lens/visual Angle | 2.6mm @F2.0/155° |
| | | Double filter automatic switching, Six 850 - nm high power infrared lamp, night vision 10 meters |
| | IR control | IR opens night vision Automatic detection of infrared and ICR IR shuts the night vision function off the infrared and the ICR is fixed in daily viewing mode |
| | Compression standard | H.264 Main Profile/H.264 Baseline Profile/MJPEG/JPEG Baseline |
| video | _ | More stream[]1080P/15fps+720P/15fps+VGA/30fps+QVGA/30fps+1080P@1fsJPEG snap |
| | resolution | 1080P |
| | input | 1 channel built-in - 48dB microphone |
| | output | Built-in speaker (8 Ω 1 w) |
| audio | interphone | Two - way voice - speak, bring back the echo cancellation |
| | Compression standard/ code rate | ADPCM/32kbps |
| | Network protocol | TCP/IP,HTTP,TCP,UDP,SMTP,FTP,DHCP,DNS,DDNS,NTP,UPnP,RTSP[]P2P |
| network | wireless network | 802.11b/g/n |
| | Wireless network security | WPS Security encryption |
| | wireless connection | One-button WIFI configuration |
| , i d a a | Video mode | Mobile detection video, doorbell button trigger video, manual video |
| video | storage | The TF card stores the maximum support for 32gb |

| other | power | Battery power supply two section 18650 core international general |
|-------|-------------------|---|
| | Power consumption | Standby current 200 uA working current 170MA |
| | work environment | Working temperature: $-10 \sim 50$ °C, humidity is $< 95\%$ |
| | installation | Door wall mounting |
| | material | ABS |
| | Product size | 140mmx45.5mmx27.5mm |